

VERSETTA STONE®

Versetta Stone® is a mortarless, cement-based manufactured stone veneer with a unique, panelized design that is installed with mechanical fasteners, recreating the beauty and craftsmanship of authentic stone masonry with a modern installation method.

- Installs with screw or nails
- No metal lath or scratch coat necessary to install
- Panels interlock with tongue & groove system
- No seasonal restrictions on installation
- For interior and exterior applications

THE VERSETTA STONE® SYSTEM



Universal Corner




Flat Panel



J-Channel



Starter Strip



Wainscot Cap



Light Box
10" x 8"
1-3/4" Thickness



Receptacle Box
8" x 6"
1-3/4" Thickness



Trim Stone

PERFORMANCE

- Built-in 1/4" rain screen†
- Drain holes in nail strip and starter channel allow incidental water to exit the system
- G-90 galvanized nail strip
- Nail strip embedded in concrete provides 200 lb. pull out strength in 6" sample, and 1,200 lb. for a full panel
- ICC Evaluation Services Report ESR-2859
- Minimum 50% Recycled Content as verified by UL
- Environment™
- 50-year transferable Limited Warranty

FIRE PERFORMANCE

Property	Test Method	Result
Surface Burning Characteristics	ASTM E 84	Flame Spread = 0 Smoke Developed = 0

PHYSICAL PROPERTIES (Expressly For Warranty Purposes, Excluding Dimensions)


Property	Test Method	Result
Heat/Rain Resistance	AC90/ASTM C 1185	Pass
Wind Load*	ASTM E 330	> 120 psf uniform load test pressure > 90 mph most exposures
Freeze Thaw	ASTM C 666/ASTM C 67	< 3% Mass Loss, 50 Cycles
Flexural Strength	1. Manufacturer 2. AC90	1. Average equil. flex. = 528 psi 2. Flexural strength retention = 85%
Efflorescence	AC51/ASTM C 67	No notable efflorescence
Water Tightness	AC90/ASTM C 1185	No water droplets observed.
Dimensions; Tolerances	Manufacturer	Tolerance from the nominal shall be 2% with a maximum variation of 1/8 in. (3.175)
Weight	ASTM C 567	Average coverage weight 8.8 psf

† For material produced prior to October 1, 2015, the rain screen may measure 3/16" but is fully compatible with products produced after that date.


* Specific details of exposure, height, area and safety factors will be required for wind resistance on a specific project

DIMENSIONS (NOMINAL)


Flat Panel

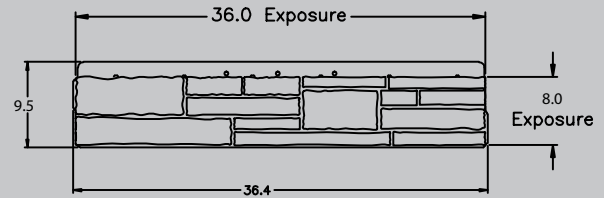

Wainscot Cap

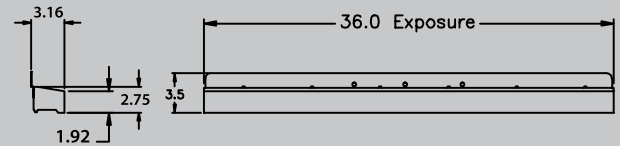

Trim Panel

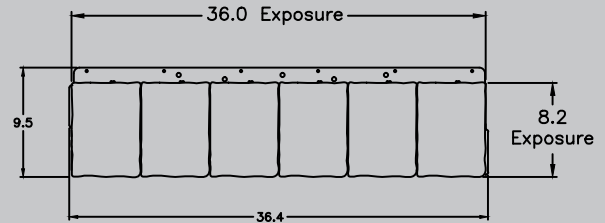

Universal Corner (Un-cut)

